



GREASE TRAP

ITEM #A-9

WEIGHT - SEE CHART BELOW

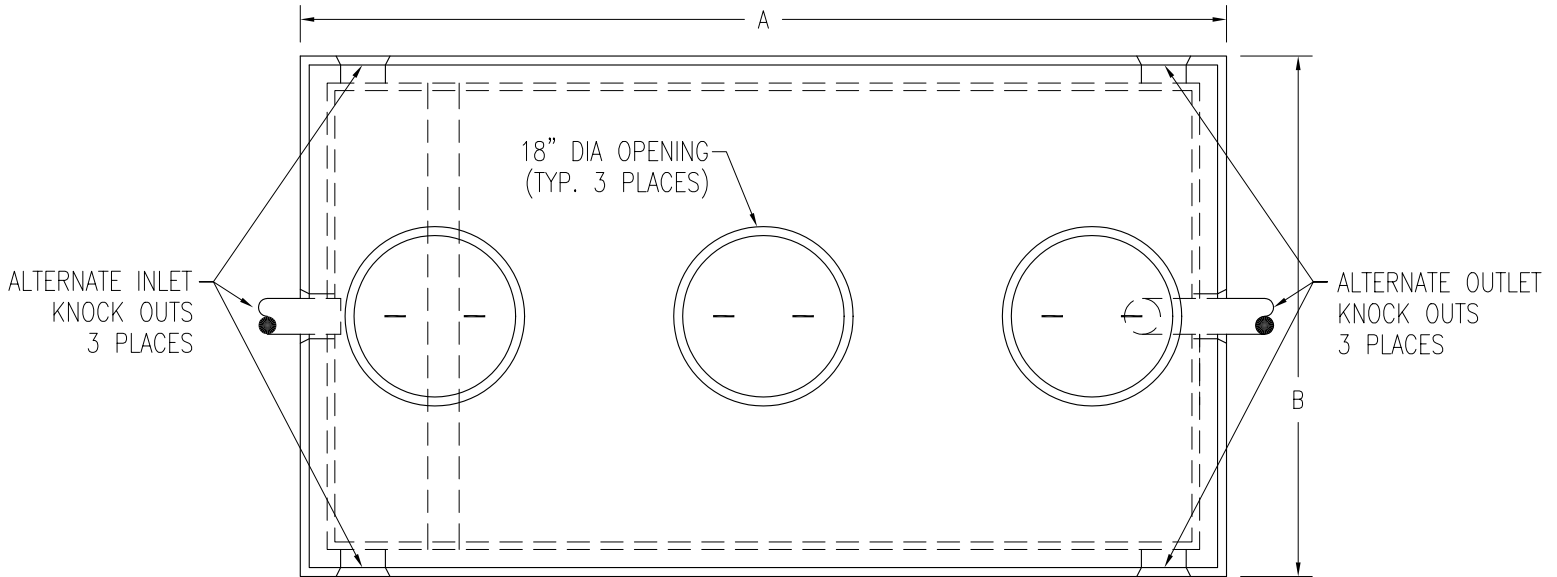

TOP VIEW

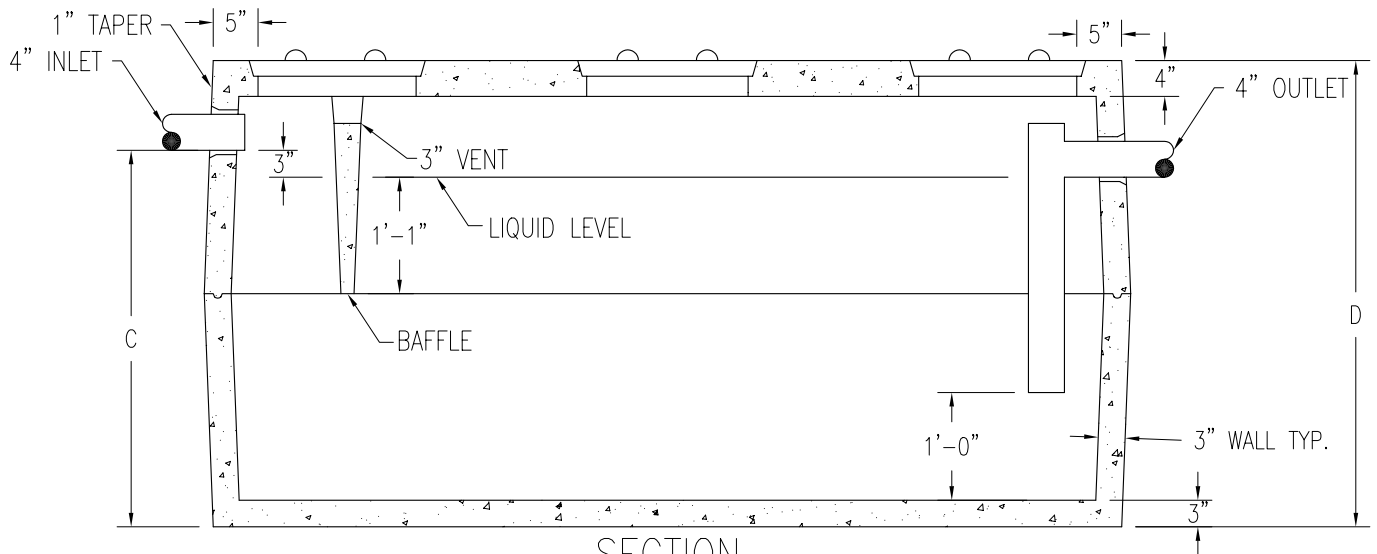

SECTION

LIQUID CAPACITY	A	B	C	D	WEIGHT	ITEM #	HEAVY DUTY ITEM #
750	8'-6"	4'-10"	42"	52"	7400 LBS	A-901	A-901HD
1000 REG	8'-6"	4'-10"	55 1/2"	64"	8100 LBS	A-902	A-902HD
1000 LB	10'-6"	6'-4"	37 1/2"	48"	10,500 LBS	A-903	A-903HD
1500	10'-6"	6'-4"	55 1/2"	64"	11,220 LBS	A-904	A-904HD
2000	10'-6"	6'-4"	65"	74"	12,250 LBS	A-905	A-905HD

DESIGN NOTES:

- 1 - CONCRETE 4000 PSI AT 28 DAYS.
- 2 - INLET BAFFLE IS PRECAST AS ONE UNIT WITH THE TOP SECTION OF THE SEPTIC TANK.
- 3 - TANKS REINFORCED WITH 6X6X10 G.A. WIRE.
- 4 - KEYED JOINTS SEALED WITH ASPHALT SEALANT.
- 5 - HEAVY DUTY SEPTIC TANK TOPS REINFORCED WITH 1/2" REBAR ON 6" CENTERS EACH WAY.
- 6 - GREASE FILTER AVAILABLE.